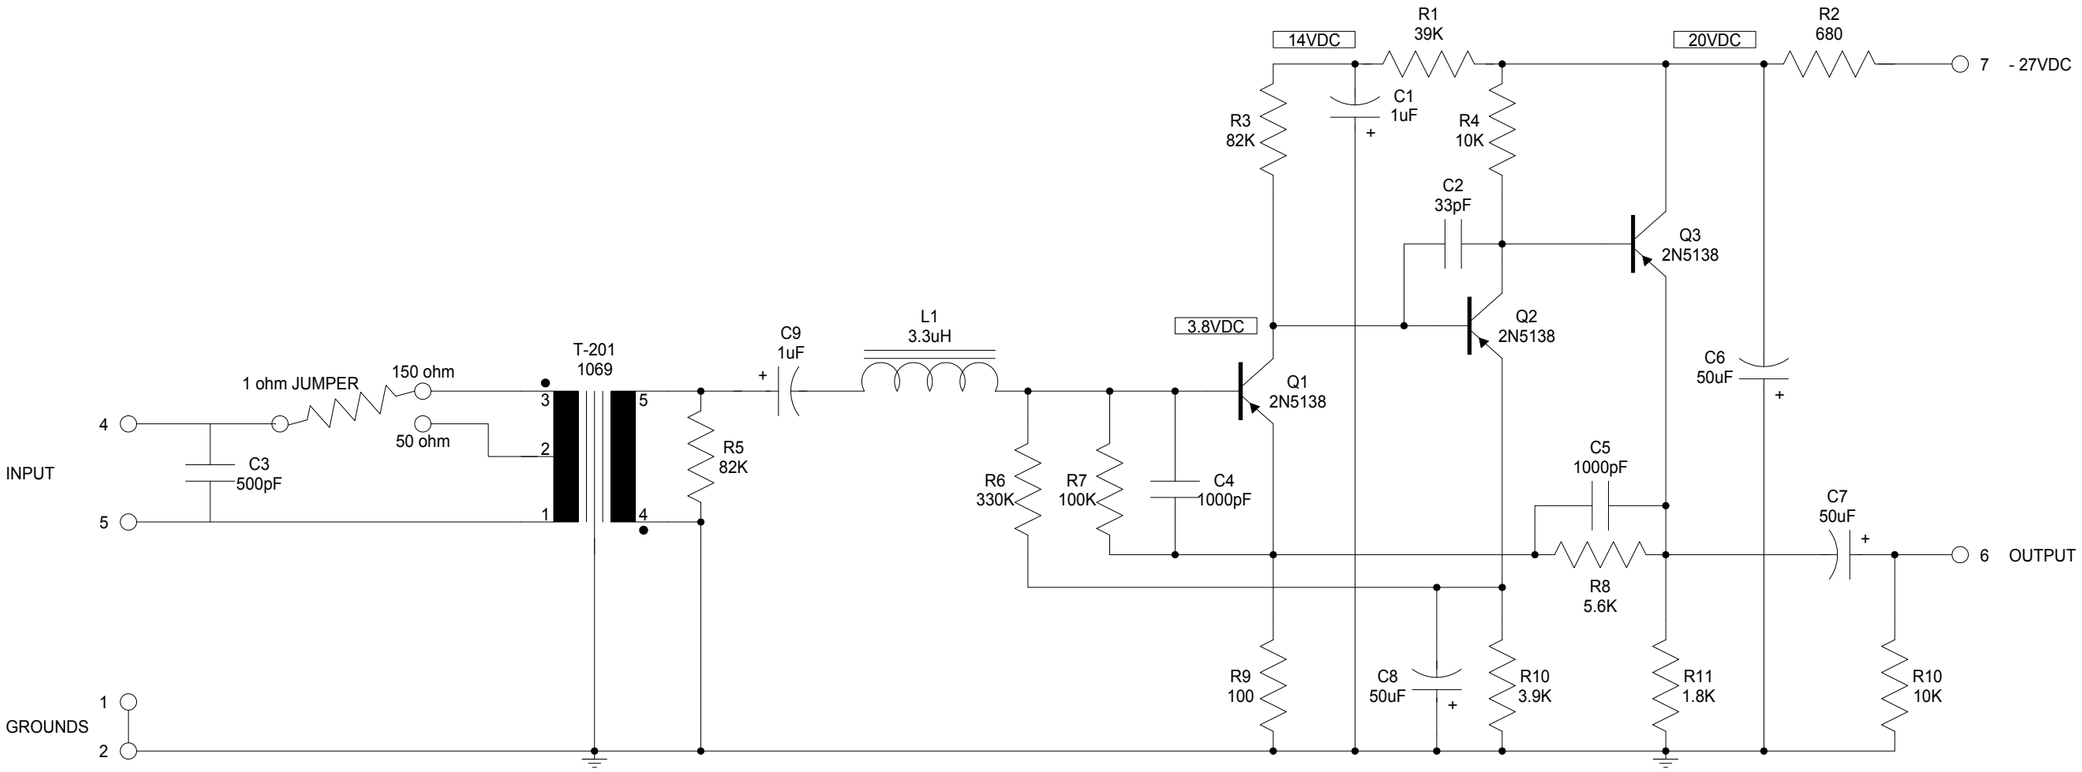

▭ = Nominal DC Voltages
Use VTVM or FETVM

All transistors must have
0.6V nominal forward
emitter to base bias.

F	ECR 643
E	ECR 243
D	ECR 234
C	ECR 105
B	ECR 50
A	ECR 43

1008A-5	1018	FUNCTION
1	4	INPUT
2	5	INPUT
3	1	GND
4	2	GND
5	—	N.C.
6	6	OUTPUT
7	3	-27VDC

REDRAWN BY DAVID WIGFIELD JUNE 2014 STEAM POWERED RADIO.COM

SPARTA
ELECTRONIC CORPORATION
SACRAMENTO, CALIFORNIA

TITLE
1018
MICROPHONE PREAMP
(401 BOARD)

DRAWN. SMU DATE. 8-28-69
APPD. RKO DATE. 2-9-70

SHT OF
1 1

DWG. NO.
S-11G